

Accessories - Electric Over Air Remote Control System

How To Order

To order separately, specify complete model number as shown. This model code includes: Series, Type of Control, Pendant (P) or Lever (L), Control Length and Options.

To order with a complete unit use appropriate control option in model driver, specify control type pendant or lever.

Example: E/A-PCS20L


E/A	- PCS	20	L
Base model	Control type	Control length	Options
	P = Pendant L = Lever	20 = 20 ft (standard) XX = Specify length in feet	L = Overspeed indicator light

This updated remote control allows unlimited distance between the operator and winch or hoist without the excessive pressure drops, quick exhaust valves and resultant delays found in air control lines. On pendant controls, dialing-in an electrical setting determines the speed. Push buttons provide haul-in or pay-out. For variable speed control, the control buttons are depressed and the dial-in knob provides proportional control. The joystick lever control provides traditional winch style variable speed in a hand-held or wall mounted control box.

Standard Features

- Portable, easy to hold control pendant
- NEMA 4 control box and pendant
- Holding down the control button and turning the Dial-in control provides variable speed
- Automatic return to center when joystick is released
- Emergency stop button on control enclosure
- Unlimited control length
- Requires pilot control valve chest for field retrofit
- Adaptable to most air winch models and Hercu-Link™ air hoists

Pendant Control

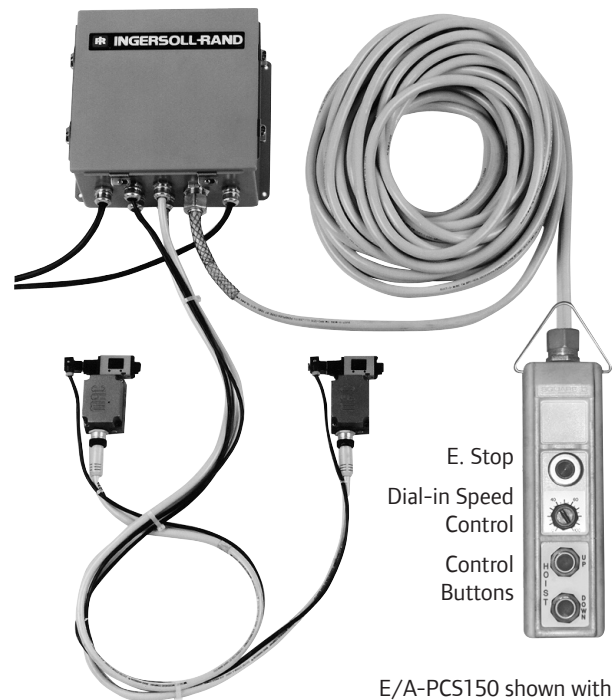

E/A-PCS150 shown with 150 ft (46 m) of control cable

Joystick Lever Type Control

