


# Accessories - Piston Motor Trolleys

## How To Order

Specify trolley by complete model number as illustrated below. This model includes: Base model, Wheel type, Man Rider™ rating, Control, Control length and Options. **Example: ATCT-MR15/3-210B** = ¼ – 3 ton trolley with flat tread wheels, a 3 ton utility rating and 1.5 ton Man Rider™ rating, a one motor pendent, 10 feet of control length and bumpers.

ATC	T	MR15/3	2	10	B
<b>Base model</b>	<b>Wheel</b>	<b>Man Rider</b>	<b>Controls</b>	<b>Control length</b>	<b>Options</b>
ATC (¼ – 3 tons) ATE (4½ – 6 tons)	- = Tapered T = Flat tread TP = 3.25" patented track only	MR15/3 = Utility rating 3 ton Man Rider™ 1.5 ton MR3/6 = Utility rating 6 ton Man Rider™ 3 ton	0 = No pendent 2 = MR-K269C (Std.) (1 motor) 3 = C6H20A-A169B (1 motor) 4 = MR-A122C (2 motor) 5 = C6H20A-A122B (2 motor) 6 = MR-A132C (3 motor) 7 = C6H20A-A132B (3 motor)	XX = Control drop; specify length in feet 7 ft (2.1m) is standard	B = Bumpers H = Hook-on adapter P = Marine 812 finish paint P1 = Marine 812-X paint system W = Client witness of load test

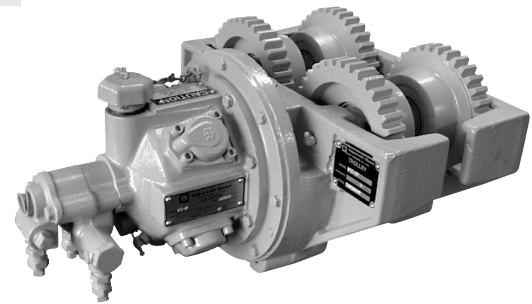

ATC Piston Motor Driven Trolley