


Force 5™ “Third Generation” Air Winch Series

4,000 to 10,000 lb (1 818 to 4 545 kg) capacity

How To Order

Specify winch by complete model number as illustrated below. This model code includes: Series, Capacity, Generation – Drum Length, Drum Brake, Disc Brake, Control, Options. **Example: FA2B-24XK1G**

FA	2	B	-	24	X	K	1	G
Series	Generation				Drum brake		Control	Options
FA = Air powered HU40A (*) (*) Substitute for FA2B	A = Third generation B = Fourth generation				X = No drum brake M = Manual drum brake		1 = Std. throttle lever 2XX = Remote full flow lever throttle 3XX = Remote pilot pendent throttle Note: XX = Specify hose length in feet	B = Extended warranty E = Construction cage F = Free spool clutch G = Drum guard H = Open frame for horiz. pulling J = Air Line Accessories V = Press Roller Y = Overload protection with E-Stop provided on lever throttle
	Capacity				Disc brake			
	Tons/lbs 2 = 4,000 2.5 = 5,000 5 = 10,000				X = No auto disc brake K = Auto disc brake			
	Drum length							
	FA2B	FA2.5A	FA5A					
	7	Yes	Yes	NA				
	12	NA	NA	Yes				
	24	Yes	Yes	Yes				

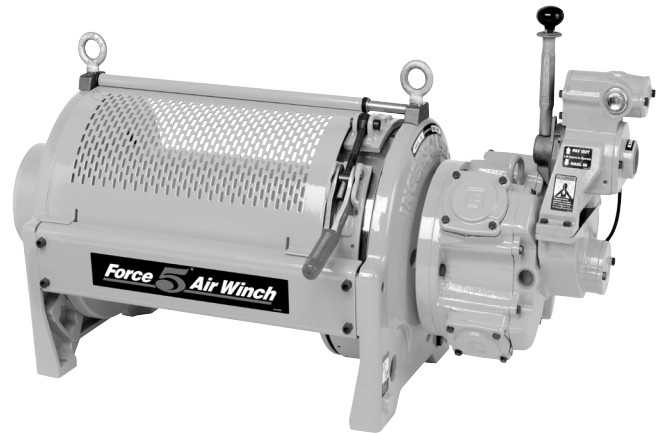

FA2B with manual drum brake,
auto disc brake, drum guard,
and K5C2 control valve

Ingersoll Rand strongly recommends using Drum Guards with all winches to prevent inadvertent contact with winch moving parts.