

FA150KGi Man Rider™ Air Winches

330 lb (150 kg) capacity

How To Order

Specify complete model code as shown. To order options, use the option code in the option table and add as a suffix to the model code.

Example: FA150KGiMR12A1-ABHR-CE

FA	150KGi	MR	12	A	1	-	ABHR-CE
Series FA = Air powered	Personnel capacity kg (lbs) 150KGi = 150 (330)	Man Rider™ MR = Man Rider™	Drum length 12	Control 1 = Std. winch mounted		Options (see notes)	
			Brakes A = Automatic drum brake				

Option notes:

(1) **M1** – Material traceability certificates according to EN 10204 (Ex DIN 50049) 2.2 on load bearing parts. This conformity document affirms (by the manufacturer) that parts are in compliance with the requirements of the order based on non-specific inspection and testing (i.e., results are typical material properties for these parts).

M2 – Material traceability certificates according to EN 10204 (Ex DIN 50049) 3.1 on load bearing parts. These documents affirm (by a department independent of the manufacturing department) that the actual parts used in the product are in compliance with the order based on specific inspection and testing (i.e., results are actual material properties for those parts).

M3 – Material traceability certificates according to EN 10204 (Ex DIN 50049) 3.1 on load bearing parts. These documents affirm (by a department independent of the manufacturing department) that the actual parts used in the product are in compliance with the order based on specific inspection and testing (i.e., results are actual material properties for those parts in a finished, as delivered condition).

7 = Drum grooving; specify rope size in sixteenths, e.g., 7 = 7/16"

A = Drum guard with manual rope guide

B = Winch pedestal base

C1M3= -20° C ABS

C2M3= -20° C DNV

H = Stainless steel hose package

K = Stowage valve kit installed on winch

M1 = Per DIN 50049/EN10204 Para 2.2 "Typicals" ⁽¹⁾

M2 = Per DIN 50049/EN10204 Para 3.1 actual per product as purchased ⁽¹⁾

M3 = Per DIN 50049/EN10204 Para 3.1 actual per product as delivered in final condition ⁽¹⁾

N4 = Manufactured under ABS survey

N5 = Manufactured under DNV survey

P1 = Marine 812-X paint system

P2 = Marine 812-X paint system - isocyanate free

R = Emergency lowering system


W1 = ABS witness test

W2 = DNV witness test

W3 = LRS witness test

W4 = Client witness of load test

-CE = **Compliance with the European Machinery Directive**

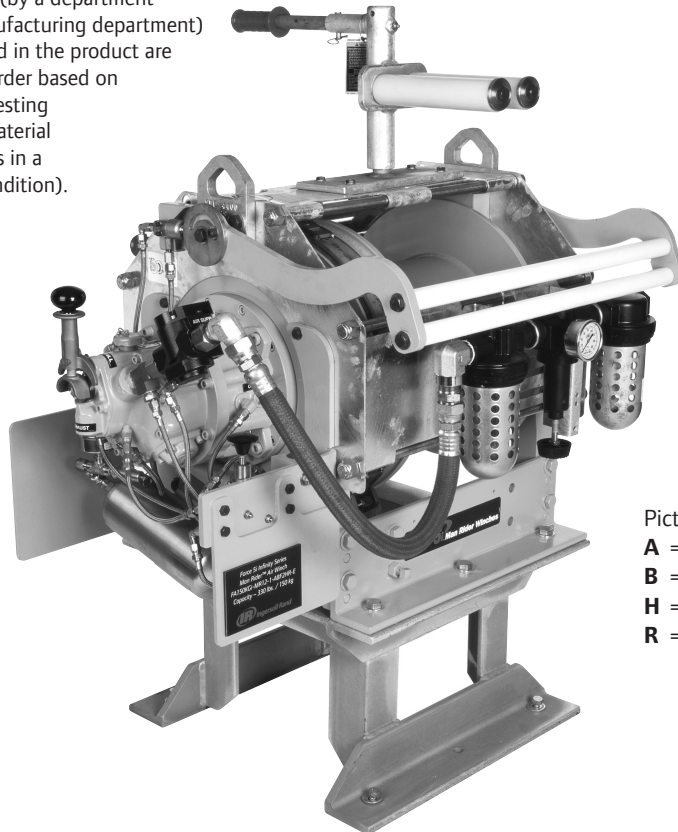

Pictured unit includes following options:
A = Drum guard with manual rope guide
B = Winch pedestal base
H = Stainless steel hose package
R = Emergency lowering system