


Force 5i™ Infinity “Oil Drilling” Man Rider™ Air Winch Series

3,180 to 6,870 lb (1 445 to 3 124 kg) capacity

How To Order

Specify winch by complete model number as illustrated below. Add options in the order of their listing. Order accessories separately by part number. **Example: FA2.5i-MR24MK1GP**

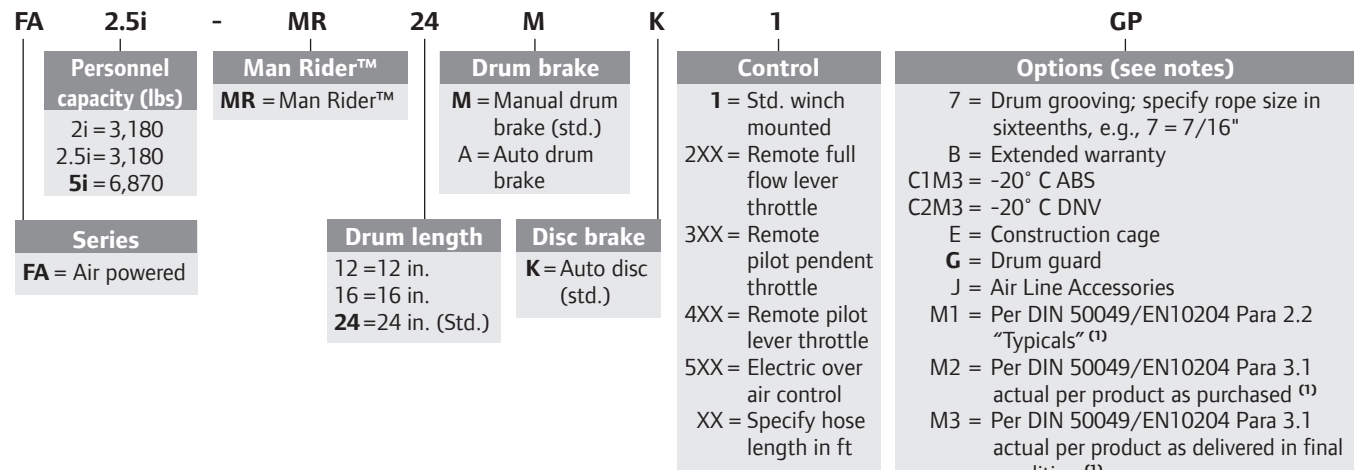

Option notes:

(1)**M1** – Material traceability certificates according to EN 10204 (Ex DIN 50049) 2.2 on load bearing parts. This conformity document affirms (by the manufacturer) that parts are in compliance with the requirements of the order based on non-specific inspection and testing (i.e., results are typical material properties for these parts).

M2 – Material traceability certificates according to EN 10204 (Ex DIN 50049) 3.1 on load bearing parts. These documents affirm (by a department independent of the manufacturing department) that the actual parts used in the product are in compliance with the order based on specific inspection and testing (i.e., results are actual material properties for those parts).

M3 – Material traceability certificates according to EN 10204 (Ex DIN 50049) 3.1 on load bearing parts. These documents affirm (by a department independent of the manufacturing department) that the actual parts used in the product are in compliance with the order based on specific inspection and testing (i.e., results are actual material properties for those parts in a finished, as delivered condition).

All winches with the “-CE” option are fitted as standard with the following CE package:

- Drum Guard
- Emergency Stop Valve (main air shut-off)
- Exhaust Muffler
- CE Documentation
- Limit Switches

All Force 5i™ units come with standard wire rope anchor and winding directions for right lay overwind.