

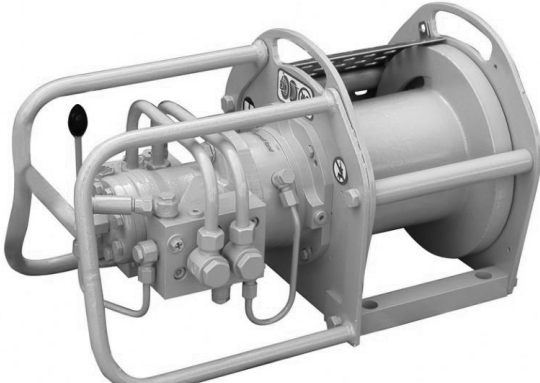
# Liftstar® & Pullstar® Portable Hydraulic Winches

1,323 to 2,205 lb (600 to 1 000 kg) capacity

## How To Order

Specify complete model code as shown. To order factory fitted options add the appropriate letter suffix to the standard model code. Accessories should be ordered separately.

Example :

<b>LS2</b>	<b>600H</b>	<b>75</b>	<b>GC</b>	-	<b>L</b>	-	<b>GQZ</b>
<b>Series</b>	<b>Capacity</b>	<b>Motor displacement</b>		<b>Drum</b>	<b>Options and factory mounted accessories</b>		
LS2 = 2nd Generation PS2 = 2nd Generation	600H = 600 kg 1000H = 1,000 kg	30 = 30 cm <sup>3</sup> 40 = 40 cm <sup>3</sup> 75 = 75 cm <sup>3</sup>		No letter = standard GC = long drum	CM = Low Temp Design (-20°C) G = drum guard K = skid frame L = Automatic spooling device M = Material traceability certificate as per EN 10204 3.1 on main load bearing parts P = marine paint finish QZ = offshore paint incl. sandblasting R = press roller W = Witness test. Specify W1 for ABS or W2 for DNV or W3 for LRS or W4 for Client witness of load test 16 = grooved drum for 16mm rope		
				<b>Control</b>			
				L = Direct lever control DPXXM = Full flow remote control JCXXM = Remote pilot control, Joystick type NOTE: XXM = specify hose length needed in meter			

**NOTE:** Order entry requires a dedicated model and CPN created in the ESA ordering system.

Contact your local Client Services Representative and request the creation if necessary.

**Ingersoll Rand strongly recommends using Drum Guards with all winches to prevent inadvertent contact with winch moving parts.**