

Application Bulletin.....Application bulletin...

HIBON Positive displacement blower in package SNH 1 SP ATEX Type B1 used in steel industry.



Features

Gas : N2 (Nitrogen) 95% - C6H6 (benzene) 5%

Inlet pressure: 1013 mbar Abs



Outlet Pressure: 1213 mbar Abs

Differential Pressure : 200 mbar

Flow : 143 m³/h

End user site : FINLAND

Particularities : ATEX Zone 2

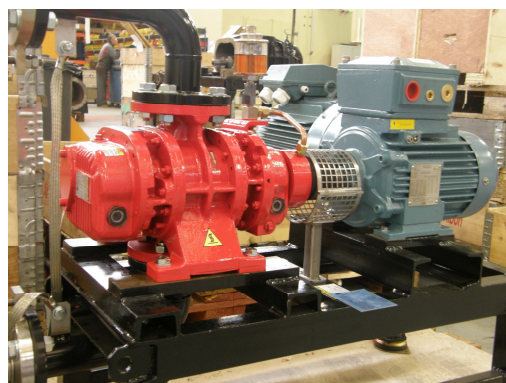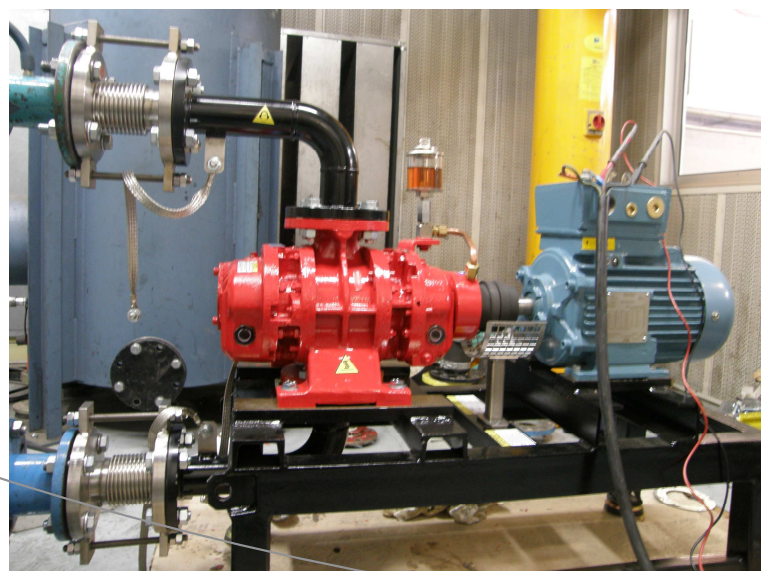

Ingersoll Rand Air Solutions Hibon®

2 avenue Jean-Paul Sartre
59290 WASQUEHAL France
Tel +33 (0) 3 20 45 39 39
Fax +33 (0) 3 20 45 39 97
www.hibon.com

www.ingersollrand.com